



## UDFP 37mm panel mount LED multi strobe beacon

- Ø 60 mm panel-mount LED multi-strobe beacon
- Good signalling effect
- Tamper and vandal-proof, high impact resistance IK10
- High degree of protection IP 66
- Modern LED technology and electronics
- 2 different strobe patterns, can be switched externally
- For industrial and general applications
- User-friendly connection technology, panel size Ø 37 mm



### TECHNICAL DATA

|                        |  |
|------------------------|--|
| Housing                | Ø 60 mm, Polycarbonate black (RAL 9005)                                |
| Lens                   | Polycarbonate, ribbed inside orange, red, clear, blue, green or yellow |
| Type of mounting       | any  |
| Panel size             | 37 mm  |
| Connection technology  | Screw/plug-in terminal   |
| Leakage current        | 0,003 A (PLC-suitable)   |
| Beacon type            | LED multi strobe beacon  |
| Light source           | 12   |
| Strobe/flash frequency | 6x strobe/multi strobe 1 Hz  |
| Duty cycle             | 100 %  |
| Service life           | Light source: >50.000 h  |
| Operating temperature  | -30°C/+60°C  |
| Degree of protection   | IP66 & UL Type 4/4x/13   |
| Impact resistance      | IK10   |
| Weight                 | 103 g  |

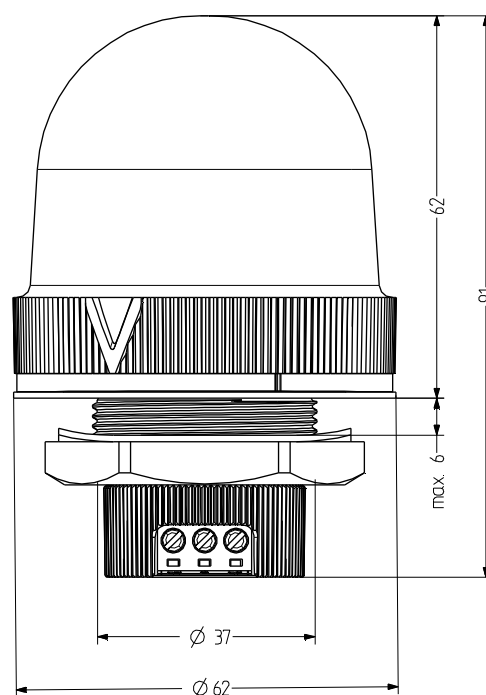

## UDFP

## ORDER DATA

| Lens colour | Nominal voltage | Voltage range (V)        | Nominal current (A) | Order number |
|-------------|-----------------|--------------------------|---------------------|--------------|
| orange      | 24 V AC/DC      | 18-27 V AC<br>20-32 V DC | 0,120               | 858 581 405  |
|             | 110-120 V AC    | 75-132                   | 0,033               | 858 581 310  |
|             | 230-240 V AC    | 150-264                  | 0,033               | 858 581 313  |
| red         | 24 V AC/DC      | 18-27 V AC<br>20-32 V DC | 0,120               | 858 582 405  |
|             | 110-120 V AC    | 75-132                   | 0,033               | 858 582 310  |
|             | 230-240 V AC    | 150-264                  | 0,033               | 858 582 313  |
| clear       | 24 V AC/DC      | 18-27 V AC<br>20-32 V DC | 0,120               | 858 584 405  |
|             | 110-120 V AC    | 75-132                   | 0,033               | 858 584 310  |
|             | 230-240 V AC    | 150-264                  | 0,033               | 858 584 313  |
| blue        | 24 V AC/DC      | 18-27 V AC<br>20-32 V DC | 0,120               | 858 585 405  |
|             | 110-120 V AC    | 75-132                   | 0,033               | 858 585 310  |
|             | 230-240 V AC    | 150-264                  | 0,033               | 858 585 313  |
| green       | 24 V AC/DC      | 18-27 V AC<br>20-32 V DC | 0,120               | 858 586 405  |
|             | 110-120 V AC    | 75-132                   | 0,033               | 858 586 310  |
|             | 230-240 V AC    | 150-264                  | 0,033               | 858 586 313  |
| yellow      | 24 V AC/DC      | 18-27 V AC<br>20-32 V DC | 0,120               | 858 587 405  |
|             | 110-120 V AC    | 75-132                   | 0,033               | 858 587 310  |
|             | 230-240 V AC    | 150-264                  | 0,033               | 858 587 313  |